



Marine Grade LCD IMO Bridge Monitor
Slimline Aluminum Bezel
Sunlight Viewable LED Backlighting

MPC-SL15

15" Marine Grade LCD Monitor

LED Backlight Brighter, Dimmer

The MPC-SL15 is a marine grade flat panel Active Matrix LCD Monitor designed for extremely rugged use where the front must be fully sealed from water, oil, dirt and other contaminants. The MPC-SL15 has a 15" diagonal display, designed for use anywhere onboard in a console or bulkhead, or it can also be VESA mounted. The front located manual dimming control adjusts the LED display brightness from max to super-dim for optimal operator viewing clarity and comfort in any lighting condition. The MPC-SL15 connects to any standard PC through the VGA output using any standard VGA cable. The monitor can also receive DVI-D video input from a high performance computer or other video sources. S-video and composite video inputs are also available for camera or other NTSC/PAL signals. The native resolution is 1024x768, but the MPC-SL15 will auto-scale any 4:3 resolution to fit full screen. Picture-in-Picture capability is standard. An optional touch screen will operate perfectly even in the wettest conditions. The matte black aluminum case and conformally coated electronics virtually eliminates any chance of corrosion for a very long service life. The standard anti-reflective protective glass is bonded to the LCD, eliminating internal and external reflections and fogging. The attractive slim bezel and compact case allow mounting in very tight spaces. When properly mounted and sealed in place, the front is rated IP65. Common applications include primary display or repeater from a computer, chart plotter, blackbox radar or sounder or weather computer. The MPC-SL15 has been certified by Bureau Veritas to pass IEC60945 testing per IACS-E10 for use on IMO Approved vessels.



Standard Features

- Slim All-Aluminum Case Rated IP65 Front.
- 15" Color TFT AMLCD, Bonded AR Protective Glass.
- XGA(1024x768) Native Resolution.
- 1,000 nit LED Brightness, 700:1 Contrast Ratio.
- Manual Linear Dimming knob from Max to ~1nit.
- Standard RGB Video from any Computer.
- DVI-D from Black Box Radar or other Computer.
- 3 - Composite Video Inputs.
- P-in-P Standard, Remote control option.
- Flush Bezel for Console Mounting, or VESA.
- Powered from 9 - 30 VDC or optional 120/240 VAC.
- Optional Waterproof Touchscreen.

WWW.MARINEPC.COM




Marine Grade LCD IMO Bridge Monitor
 Slimline Aluminum Bezel
 Sunlight Viewable LED Backlighting

MPC-SL15

Specifications

- **Display** 15" Diagonal Active Matrix TFT LCD: XGA 1024x768 pixels, 700:1 Contrast Ratio, 16.7 Million Colors
- **Brightness** 1,000 nits sunlight readable brightness, Dimmable 1000:1 for Night time Operation, LED Backlight
- **Video Input** RGB 4:3 Video from Any Standard Computer, supports VGA, SVGA, XGA, SXGA, UXGA, Auto-Scaling to Full Screen
 DVI-D Input, 3 - Composite Video Inputs
- **Touchscreen (Optional)** Analog Resistive, 2048x2048 Resolution, USB Connection to PC.
- **Cable** Power - None, Terminal Strip Provided
 Video - 3 Ft. (1m.) Shielded Cable, Standard Mini-DIN DB-15 M-M
 (Optional) DVI-D - 3 ft. (1m.) Shielded Cable, Hi-Density DVI Connectors
- **Housing** All Aluminum, Black Finish, IP65 Splashproof Front, IP22 Rear. Bezel Dimensions: 11.95"H x 13.90"W
- **Mounting** Flush Mount Bezel for Mounting in Panel or Frame. 75 and 100 VESA Mounting Holes in Rear. RAM Arm Optional.
- **Weight** 3.5 kg / 7.7 lbs.
- **Power (Max)** 41 Watts 9 - 30 VDC
- **Environmental**

Operating	Non-Operating	
Temperature (Air Ambient)	-10°C to 50°C (14°F to 122°F)	-20°C to 70°C (-4°F to 158°F)
Relative Humidity	5% to 95%, non-condensing	
Shock	50 G (half-sine for 30msec.)	
Vibration	1.0 G (@ 5 - 500 Hz sine sweep, 3 - axis)	
- **MTBF** 30,000 Hrs.
- **Standards** BV Certified Tested to IEC60945 by IACS-E10, CE, FCC Class A, Part 15

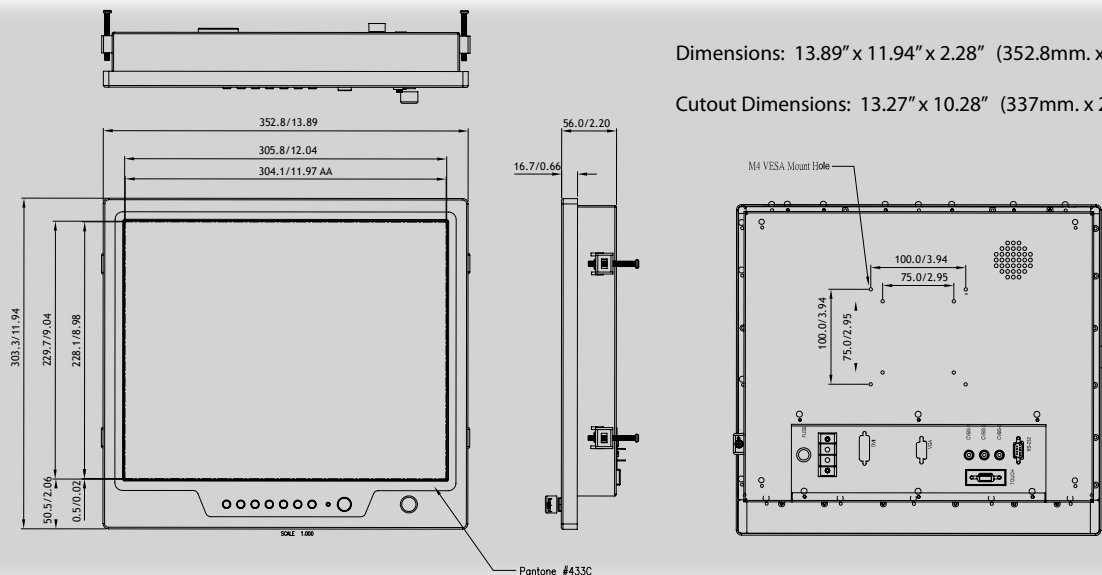

Dimensions: 13.89" x 11.94" x 2.28" (352.8mm. x 303.3mm. x 58mm.)

Cutout Dimensions: 13.27" x 10.28" (337mm. x 261mm.)